
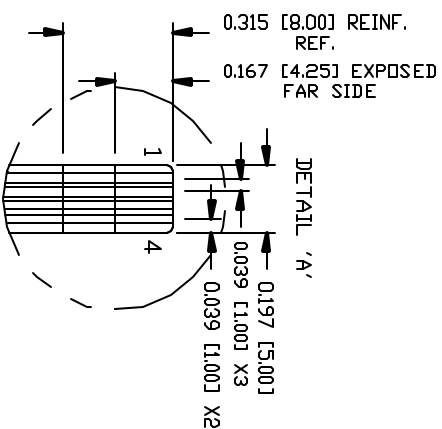


SENSOR SPECIFICATION

SPACER DOTS 2.0 MM PITCH	LINEARITY ±1.5% AVE 3% MAX. DEV.	ACTUATION FORCE FINGER: R0.8 TIP, 100G DR LESS STYLUS: R0.8 TIP, 100G DR LESS	OPTICAL PER. 79% TRANSPARENCY TYP. @ 520NM	THICKNESS 0.039 ±0.005 [1.00 ±0.13]
-----------------------------	----------------------------------------	-------------------------------------------------------------------------------------	--------------------------------------------------	-------------------------------------------

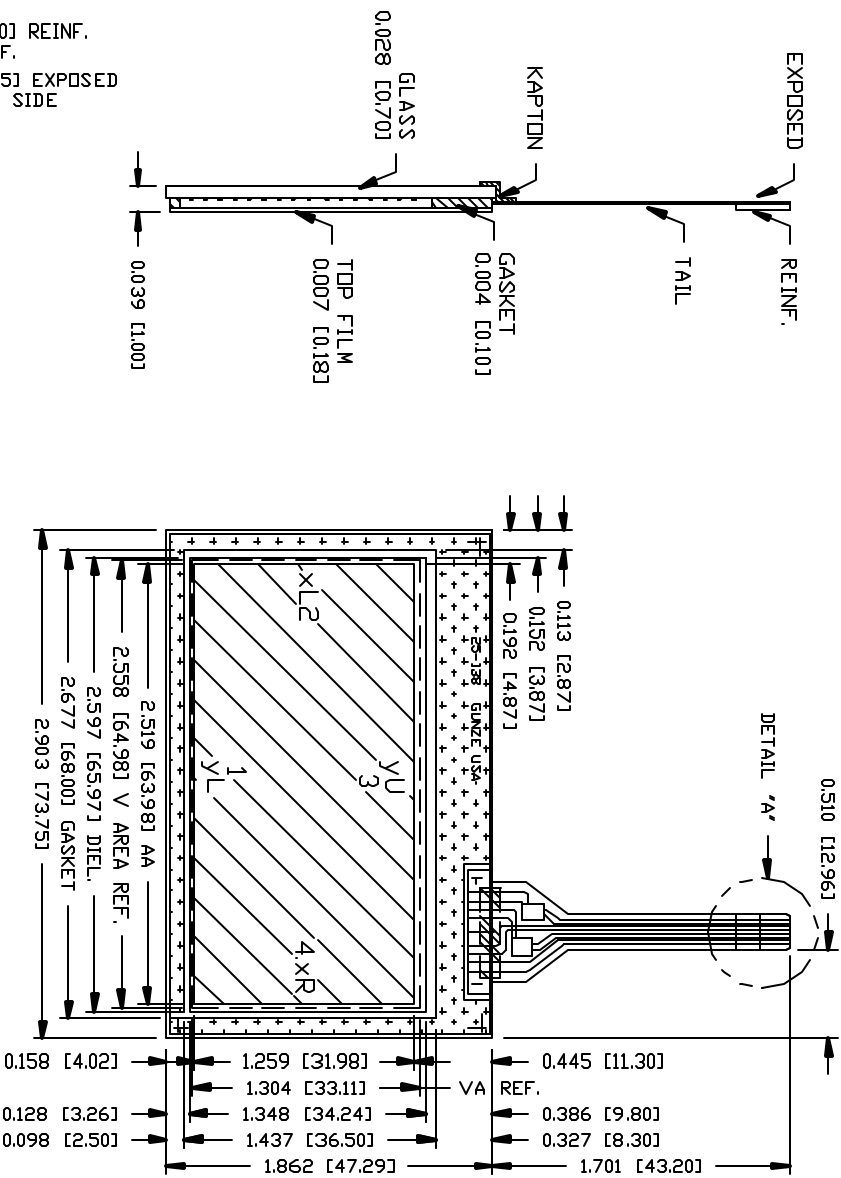

- GENERAL NOTES:**
1. TOPSHEET 0.02 FROM GLASS PERIMETER ALL AROUND.
 2. MAX. VOLTAGE & CURRENT:
 3. CONTACT POINT FROM TOP LAYER TO BOTTOM LAYER.
 4. OPERATION TEMPERATURE: 0°C TO 50°C
 5. STORAGE TEMPERATURE: 20% TO 85% -10°C TO 60°C
 6. DO NOT BEND FLEXTAIL LESS THEN 0.25 RADIUS

PINDUTS	
1	YL
2	XL
3	YU
4	XR



DRAWING INCOMPLETE WITHOUT BOM!

CAJID DRAWING NOTICE <small>THIS DRAWING IS THE PROPERTY OF GAINEZE AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. ANY UNAUTHORIZED REPRODUCTION OR TRANSMISSION IS STRICTLY PROHIBITED AND WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW.</small>	DATE: 03/08/02 REV: 1 APP'D: APULLO	SENSOR 280 4 WIRE 25-138 1 of 1
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------	----------------------------------------------

GAINEZE
One French Barber
2115 Wells Branch Parkway
Aurora, Texas 78728

REVISIONS			
NO.	DESCRIPTION	DATE	BY