
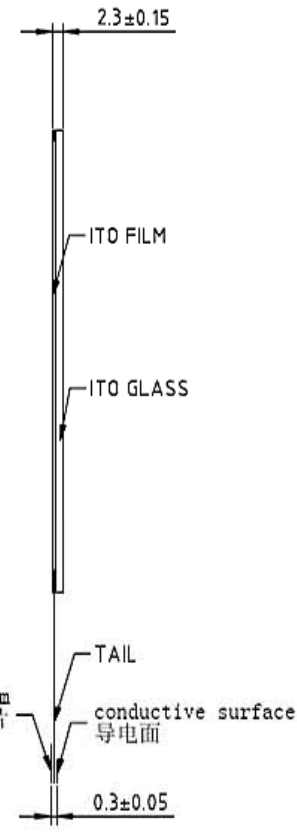


编号	原始内容

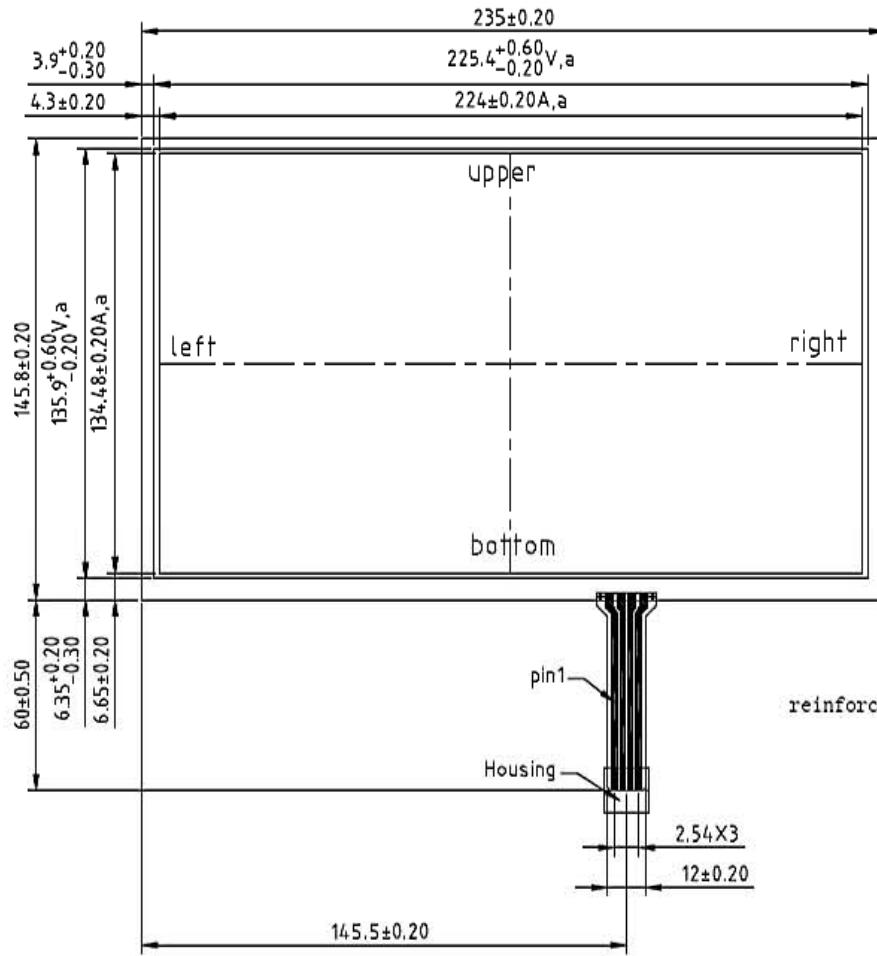

- Notes:
- Structure: film + glass + tail
film: Clear hardcoating T=0.188mm
glass: T=2.0mm
tail: FPC
Total thickness: $2.3 \pm 0.15\text{mm}$
 - Circuit rate: DCSV 1mA
 - Insulation resistance: $\geq 20\text{M}\Omega$ (25V DC)
 - Surface hardness: $\geq 3\text{H}$
 - Linearity: $\leq 2.0\%$
 - Transmission: $\geq 80\%$
 - Operating force: 60-150g
 - Touch life: $\geq 1,000,000$ times
 - Response time after touch: $\leq 30\text{ms}$
 - Operating condition: $-10^\circ\text{C} \sim +60^\circ\text{C}$
 - Storage condition: $-20^\circ\text{C} \sim +70^\circ\text{C}$
 - Tolerance: $\pm 0.20\text{mm}$

Pin NO:	Assignment
1	left
2	bottom
3	right
4	upper
比例	1:1
第三视角	

ITO.1339-2 工程图			
设计		日期	
审核		日期	
深圳数灵通 电子有限公司			